


CLOCK **1200** MY 2020

HORIZONTAL 4/5-AXIS MACHINING CENTER



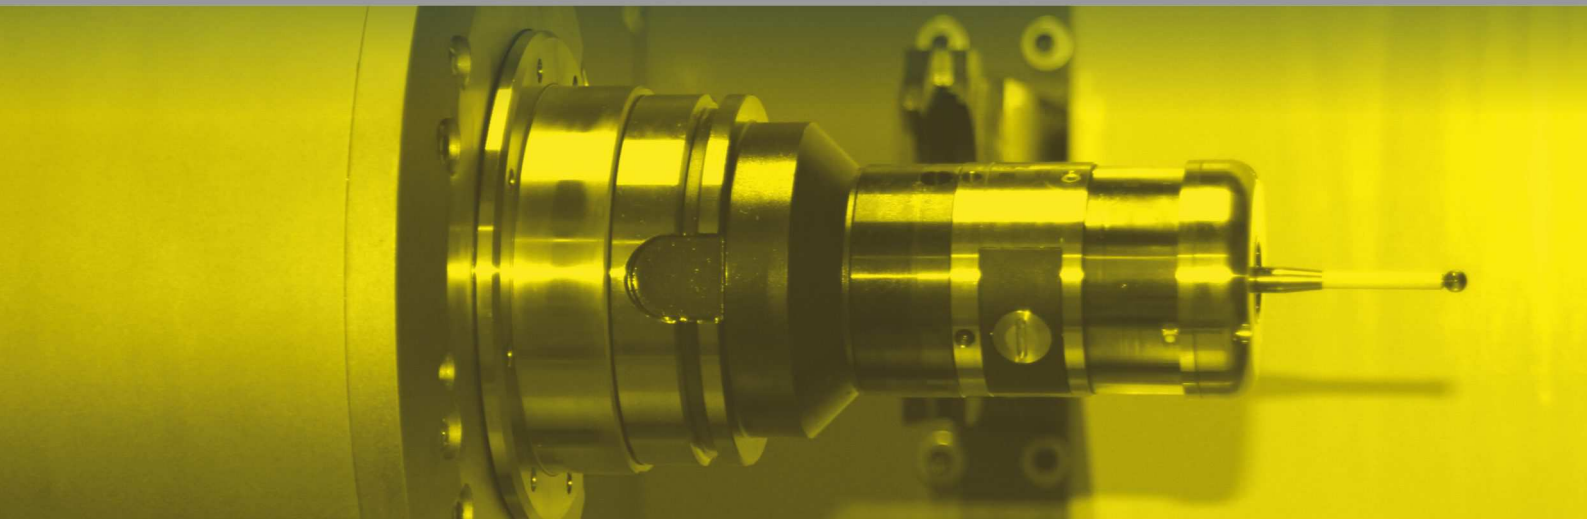

FANUC Series 30-MODEL B0

ACTUAL POSITION

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

RELATIVE

ABSOLUTE

+

+

+


CLOCK 1200

HORIZONTAL 4/5-AXIS MACHINING CENTER

Clock 1200 has been designed to match flexibility, high dynamics, rigidity and accuracy.

The machine is based on classical concepts, such as the setting in "T" configuration: upright with transverse movement and work-table with longitudinal movement.

Clock 1200 is conceived to be produced in bipallet, multipallet or FMS version. The flexibility features of its configuration allow it to be integrated with most automation systems. The base-unit is a single piece designed to be properly rigid to maintain machine's geometry over time. The design of the axes guarantees slideways and screws in the ideal position to obtain a high degree of rigidity and excellent dynamic qualities. The strongly inclined position of the X-axis slideways, together with the central and barycentric position of the Y-axis screw, are significant examples thereof. Great attention has been paid to the management of temperature behaviour, particularly the thermosymmetric structure aimed at outstanding stability over time. **Clock 1200** characteristics ensure its application in many fields from automotive to aerospace.

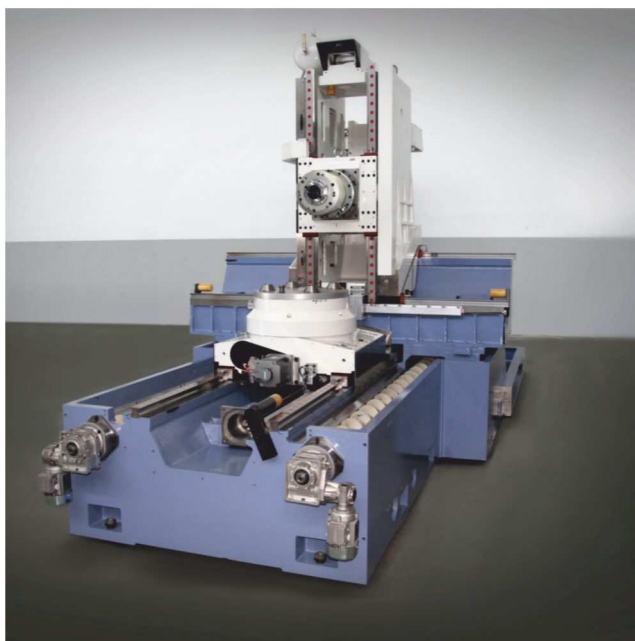



WORK-AREA

| | | |
|-------------------------|--------------------|---|
| X-axis stroke | mm | 1.200 |
| Y-axis stroke | mm | 1.100 |
| Z-axis stroke | mm | 1.000 (4 th axis) / 1.200 (5 th axis) |
| X/Y/Z axes thrust | daN | 1.300 |
| X/Y/Z rapid feed speed | m/min | 60 / 60 / 60 |
| X/Y/Z axes acceleration | m/sec ² | 7 / 7 / 7 |



ACCURACY (As per ISO 230-2 standards)

| Linear axis | | | Circular axis | | |
|-------------------------------------|----|---|-------------------------------------|---------|---|
| Accuracy of positioning (A) | μm | 4 | Accuracy of positioning (A) | arc sec | 4 |
| Sistematic positional deviation (M) | μm | 3 | Sistematic positional deviation (M) | arc sec | 2 |
| Repeatability (R) | μm | 3 | Repeatability (R) | arc sec | 3 |



PALLET AND ROTARY TABLE (4th CONTINUOUS AXIS)

| | | |
|--------------------------------|---------|---|
| Pallet dimensions | mm | 630x630 / 630x800 |
| Max. load allowed on pallet | kg | 1.500 |
| Max. fixture height | mm | 1.250 |
| Max. fixture rotation diameter | mm | 1.200 |
| Max. table rotation speed | RPM | 20 (worn-screw transmission) 40 (torque motor transmission option) |
| Min. resolution | degrees | 0,0001 |




ROTOTILTING TABLE UNIT (4th + 5th CONTINUOUS AXES) OPTION AS AN ALTERNATIVE TO THE ROTARY TABLE UNIT

| | | |
|---------------------------------|---------|--------------------|
| Pallet dimensions | mm | 630x630 |
| Max. load allowed on the pallet | kg | 1.000 |
| Max. equipment height | mm | 900 |
| Max. tool rotation diameter | mm | 1.100 |
| A-axis tilting angle | degrees | 135 (+ 25 / - 110) |
| Max. A-axis (Tilting) speed | RPM | 25 |
| A-axis min. resolution | degrees | 0,0001 |
| Max. B-axis (Table) speed | RPM | 25 |
| B-axis min. resolution | degrees | 0,0001 |



TOOL-MAGAZINE



| | | |
|--|---|-----------------|
| Type | Modular rack with tool movement system and exchange arm | |
| Tool-taper | HSK 100 / ISO 50 | HSK 63 / ISO 40 |
| Number of tools (standard version) | 89 | 120 |
| Number of tools (optional version - .up to): | 199 - 399 - 599 | 340 - 645 |
| Tool mass | kg | 30 |
| Max. length | mm | 600 |
| Max. diameter | mm | 340 |
| Tool changing time (TOOL - TOOL) | sec | 2 |



SPINDLE

| | | |
|--------------------------------|-----|---|
| Tool-taper | | HSK 100 / ISO 50 |
| Max. speed (standard version) | RPM | 10.000 (HSK 100) / 10.000 (ISO 50) |
| Max. power (standard version) | kW | 70 |
| Max. torque (standard version) | Nm | 418 |
| Tool-taper | | HSK 63 / ISO 40 |
| Max. speed (standard version) | RPM | 15.000 (HSK 63) / 10.000 (ISO 40) |
| Max. power (standard version) | kW | 36 |
| Max. torque (standard version) | Nm | 214 |
| OPTIONAL VERSIONS | | HSK 63 / HSK 100 / ISO 50 |
| Max. speed up to | RPM | 30.000 (HSK 63) / 18.000 (HSK 100) |
| Max. power up to | kW | 74 (for HSK 63 spindle at 30.000 RPM) 91 (for ISO 50 / HSK 100 spindle at 10.000 RPM) |
| Max. torque up to | Nm | 55 (for HSK 63 spindle at 30.000 RPM) 633 (for ISO 50 / HSK 100 spindle at 10.000 RPM) |

SPINDLE NEW FORM TAPERED IN ORDER TO MAKE THE APPROACH TO THE COMPONENT EASIER

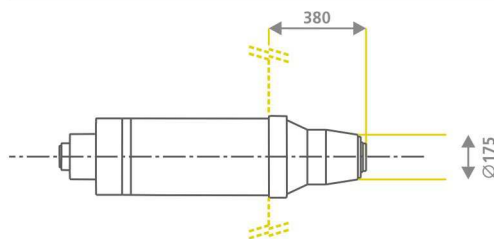

COOLANT TREATMENT UNIT (BASIC VERSION)

| | | |
|-------------------------------|-----------|---|
| Chip conveyor type | | Scraping-type (outlet on back side) |
| Total capacity | litres | 1.150 |
| Filter type | | Self-cleaning (40 microns) |
| Standard low pressure system | Flow rate | litres/min 200 |
| | | (including the machine various functionalities) |
| Standard high pressure system | Pressure | bar 2 |
| | Flow rate | litres/min 28 |
| | Pressure | bar 20 |




CNC

| | | |
|-------------|-----------------|--------------------|
| FANUC 31iB5 | SIEMENS 840D SL | D.electron CNC Z32 |
|-------------|-----------------|--------------------|





MAINTENANCE

Plant building distributed so as to improve the maintenance ergonomy





4-AXIS

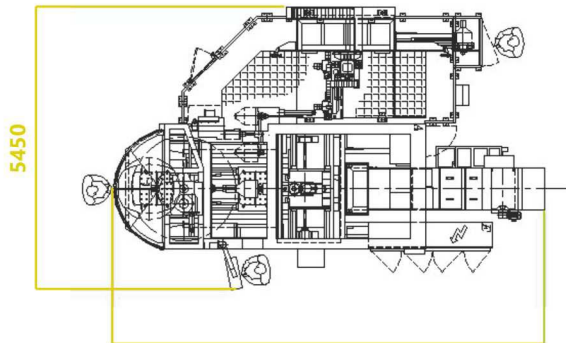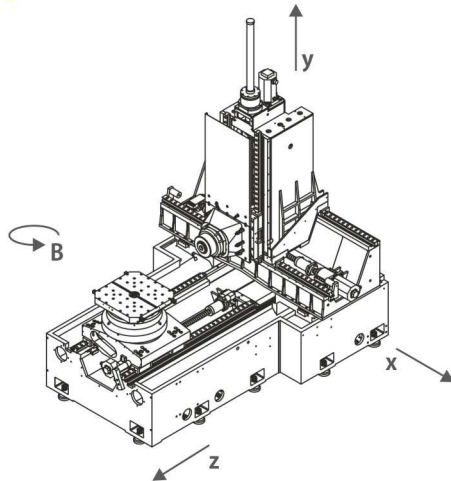

8350


BIPALLET

5-AXIS

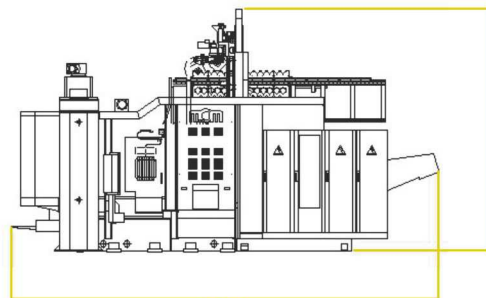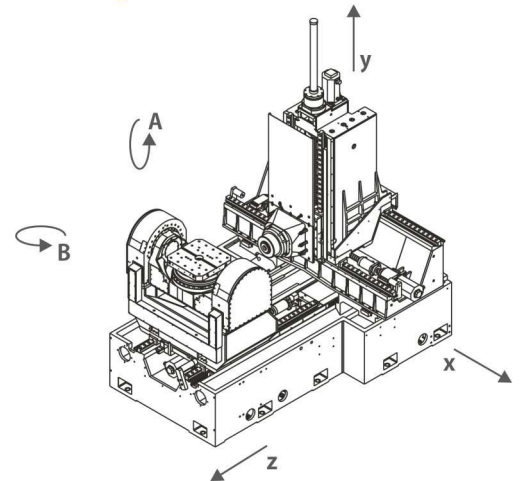


8350

BIPALLET SIDE VIEW

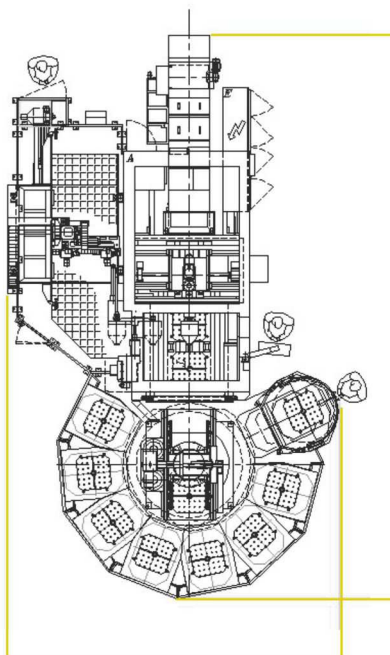

6400

MULTIPALLET

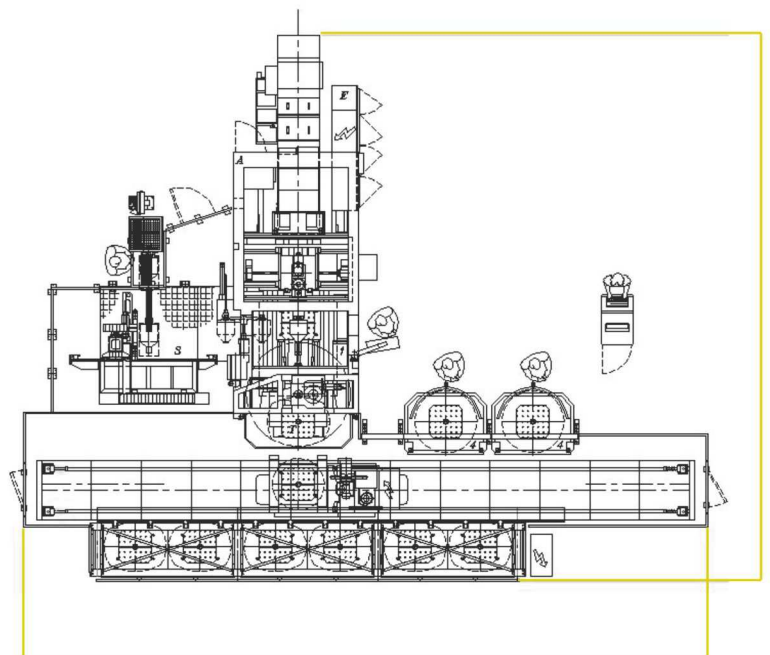

13200

FMS

CNC ENGINEERING



MCM consolidated experience in designing multitasking machining centres and the application of state-of-the-art scalable control technologies, allow flexible solutions to be developed, in order to meet any customer requirement. Thanks to the experience and the competence acquired over the years, MCM technical department engineers various types of systems,

from single cell to complex production lines, with the integration of robotised cells and machines made by other manufacturers. All the software architectures are conceived for a total integration with the manufacturing planning and managing software, jFMX, designed and produced by the software developing dept MCE.

MAIN CNCs FEATURES WITH CONFIGURABLE OPTIONS >

| CNC | SIEMENS | FANUC | D. ELECTRON |
|-----------------------|---|--|--|
| Name | Sinumerik 840D SL | 30i / 31i B5 Series | CNC Z32 Florenz Series |
| Display | 15" to 24" with/without Touch Control | 14" to 19" with/without Touch Control | 15" colour TFT Flat Panel Touch-screen/21,5" colour TFT LED display |
| User program memory | From 10 MB to 22 MB (optional) | 2 MB (8 MB optional embedded / 2GB external memory) | ≥64 GB, SSD |
| Path / Channels | up to 10 | up to 10 | up to 6 |
| Controllable CNC axes | up to 93 | up to 32 | up to 32 |
| Basic configuration | Hardware Safety integrated for all the axes and main actuators Main Siemens software packages included <ul style="list-style-type: none"> _ Remote Tool Center Point _ Advanced Position Control _ SAG compensation _ NURBS _ 3-5-axis MDynamics milling technological package | Hardware Safety Integrated for all the axes and spindles Axis CARD HRV+High-Speed CPU Main Fanuc software packages included <ul style="list-style-type: none"> _ AI Contour Control II _ Tilted Working Plane _ Conical/Spiral Interpolation _ Cylindrical/Helical Interpolation _ Tool Retract and Recover _ Rigid Tapping Retract | Hardware Safe Torque OFF for all the axes and spindles Main Software Packages D.electron included <ul style="list-style-type: none"> _ Milling and turning functionalities _ Geometric transformation (scale, rotation, mirror, metric/inch conversion) _ G114 High speed and superfinishing for moulds _ Up to 10 coordinated contemporaneous axes programmable in one block _ OPZ-G117/G118 RTCP tilting heads and tilting tables |



MCM SUPERVISING SOFTWARE jFMX

Java Flexible Manufacturing eXecutive




jFMX is the supervising software for planning and managing of flexible manufacturing systems, designed and produced by MCM software developing dept: MCE.

jFMX offers a strategic feature to a centralised coordination and an integrated management of the entire shop floor. Indeed, the machining centers equipped with jFMX, compared with those only managed by CNC, make it possible to:

- obtain a greater operational autonomy
- exploit production flexibility
- integrate the machine into a modern shop floor
- reduce the expertise required to the staff
- increase system productivity
- improve machining monitoring and control

thanks to:

- increase of unmanned work
- automatic management and planning of production
- integrated management of process and quality control information
- resource planning and improve timing of delivery schedule
- production monitoring and production cost of each component
- automatic restart of interrupted processes or machining resumption.

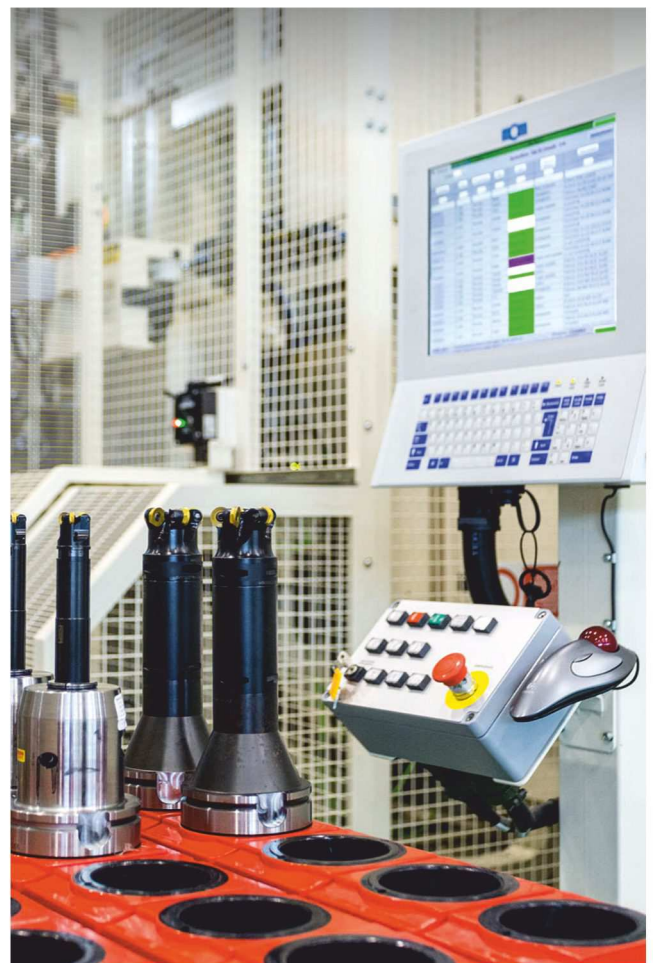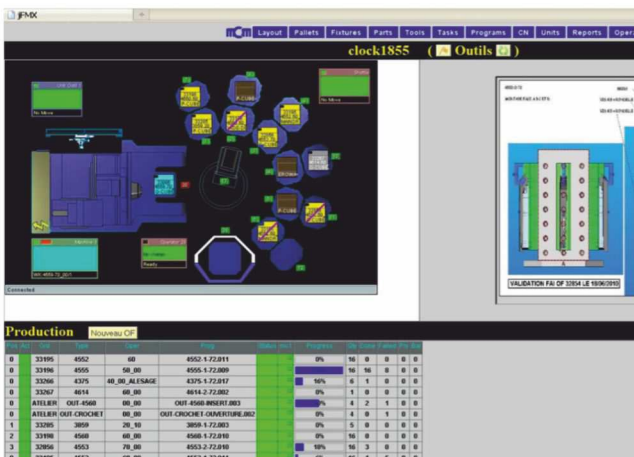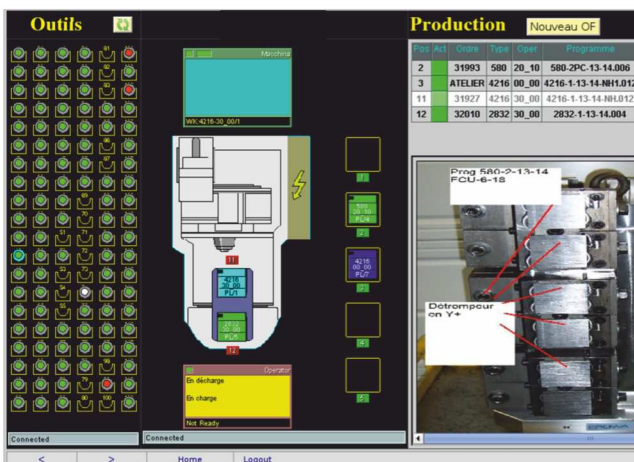

OPTIONAL




MAIN ADDITIONAL ACCESSORIES AVAILABLE

INCLUDED IN THE BASIC VERSION

OPTIONS ON REQUEST

| | | |
|--|---|---|
| Work-piece washing | ● | |
| Top protection prearranged for connection to a centralised smoke suction system | ● | |
| Tool taper washing | ● | |
| Prearrangement for inductive sensor for temperature compensation on the electrospindle | ● | |
| MCM tool monitor | ● | |
| Oil separator | ● | |
| High pressure 20 bar | ● | |
| Tool buffer | | ● |
| High pressure 80 bar with automatic variator | | ● |
| Tool integrity check | | ● |
| Coolant conditioning system | | ● |
| Renishaw or Marposs or M&H probe | | ● |
| Tool-magazine extension | | ● |
| Coolant automatic top-up | | ● |
| Exhauster | | ● |
| Two-line hydraulic feed through the pallet on the loading/unloading station | | ● |
| Two-line hydraulic feed through the pallet on the rotary table | | ● |
| Four-line hydraulic feed through the pallet on the loading/unloading station | | ● |
| Four-line hydraulic feed through the pallet on the rotary table | | ● |
| Orbital turning | | ● |

Further customisations are available on request.

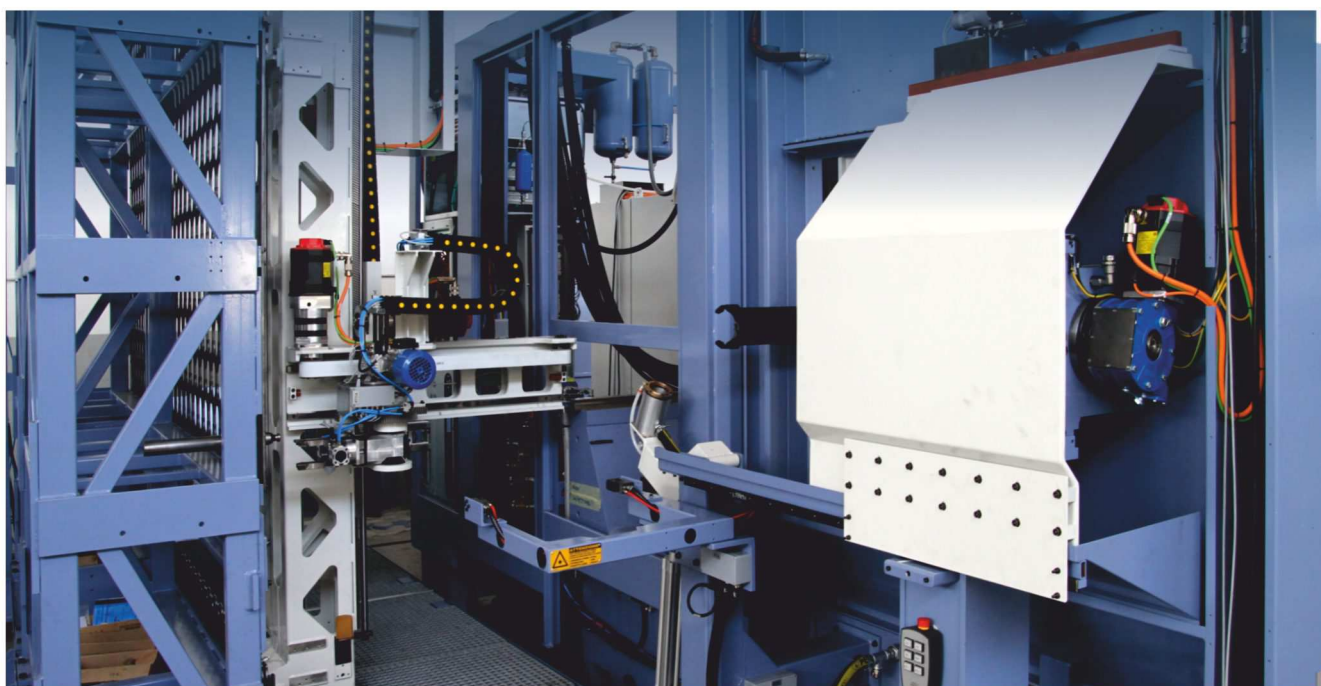



Multipallet MP10



Multipallet MP18



FMS with one level shuttle



FMS with several level shuttle

+

ver. **1.0**

+

+

+

CLOCK family

Pallet dimensions

500x500 _

500x630 _

630x630 _

630x800 _

Structures

4-axis _

5-axis _

Configurations

bipallet _

multipallet _

FMS _

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+

+


+

+

+

+

+



- _ MACHINING CENTERS
- _ FLEXIBLE AUTOMATION
- _ SYSTEM INTEGRATION
- _ SUPERVISING SOFTWARE
- _ MANUFACTURING TECHNOLOGY
- _ SERVICE

MCM Spa - Machining Centers Manufacturing
Via Celaschi, 19
29020 Vigolzone / Piacenza / ITALY
☎ +39 0523 879811
✉ mcm@mcmspa.it / divcomm@mcmspa.it
www.mcmspa.it